


Weighfeeders

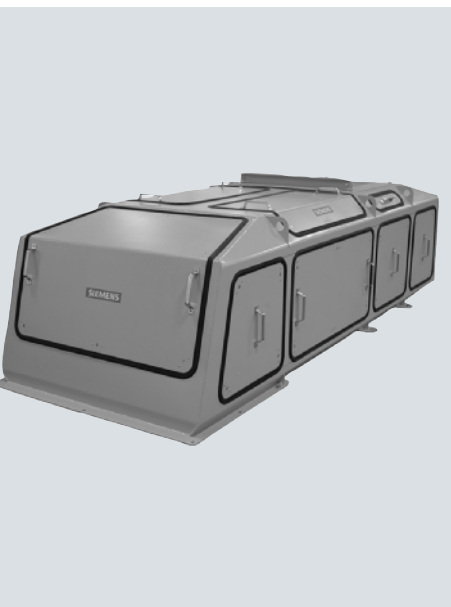

5/2

Introduction

5/5

SITRANS weighfeeders

SITRANS WW100

5/12

SITRANS WW200

5/37

SITRANS WW300

5/40

SITRANS Weighfeeder Peripherals

Weighfeeders

Introduction

Overview


SITRANS weighfeeders from Siemens can improve the accuracy of processing, blend consistencies, accountability, and record keeping. All weighfeeders come standard with a belt weigh bridge and speed sensor. An integrator is required to complete the system.

Mode of operation

The weighfeeder is used to deliver an accurate mass flow rate of material. In the majority of applications, material is profiled by an adjustable mechanical shear gate, which fixes the correct material bed depth for a given particle size.

The feed rate is then maintained and adjusted by varying the speed of the belt. However, in some cases the belt speed is constant with rate control (if any) done by a pre-feeding device.

The system consists of three components: weight and speed sensing, integration and control, and the mechanical conveying system. Using the belt load and the belt speed signals, small incremental totals of weight per time are measured by the integrator and then the flow rate is calculated. The measured flowrate is compared against the desired flowrate and the on-board PID controller makes necessary corrections to the belt speed.

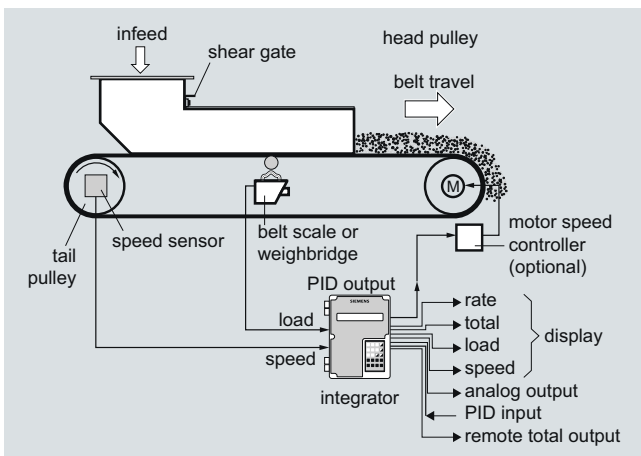

Weighfeeder operation

Design and Applications

SITRANS WW100

The platform weigh bridge mounts directly to a corrosion-resistant platform load cell. The direct load design eliminates all intermediate mechanical suspension and allows material weight to be directly applied to the load cell.

This design minimizes zero drift normally caused by intermediary suspension components and allows for the use of a very sensitive precision platform load cell. Load cell size and construction are chosen for each specific application.

SITRANS WW200

A stainless steel platform weighdeck with a Delrin plastic slider bar assembly mounts directly to two corrosion-resistant, sealed platform load cells. The direct load design eliminates all intermediate mechanical suspension and allows material weight to be directly applied to the load cells. The frame of the WW200 is sturdy and rigid, ensuring stable and repeatable results, maximizing resolution and weighing accuracy.

SITRANS WW300

SITRANS WW300 suspends a single weigh idler on platform load cells. Its design eliminates all moving parts in the weighing process and subsequent maintenance and replacement problems. There are no links or flexures. Two corrosion-resistant precision strain gauge load cells provide weight sensing signals to an integrator. This design feature minimizes zero drift and maximizes resolution and weighing accuracy. WW300 weighfeeders use a special version of Milltronics MSI single idler belt scale with a patented design for instantaneous reading of changes in belt loading, allowing for higher accuracy and control performance.

Technical specifications

Criteria	SITRANS WW100	SITRANS WW200	SITRANS WW300
Typical industries	Bulk chemicals, tobacco, food, water treatment	Bulk chemicals, tobacco, food, recycling	Cement, mineral processing, coal, mining, pulp and paper
Typical applications	High-accuracy, low-capacity for minor ingredient additives	Low- to medium-capacity for minor ingredient additives	Medium- to high-capacity for macro ingredient additives
Design rate range	45 kg/h ... 18 t/h (100 lb/h ... 20 STPH)	0.45 ... 100 t/h (1000 lb/h ... 1100 STPH)	4.5 ... 800 t/h (5 ... 880 STPH)
Belt speed	0.005 ... 0.36 m/s (1 ... 70 fpm)	0.005 ... 0.36 m/s (1 ... 70 fpm)	0.005 ... 0.36 m/s (1 ... 70 fpm)
Accuracy¹⁾	± 0.25 ... 0.5 %	± 0.5 % or better	± 0.5 % or better
Specified range	10 ... 100 % based on speed	10 ... 100 % based on speed	10 ... 100 % based on speed
Sensing element	Long length platform weigh bridge Single load cell	Platform weigh bridge Dual load cells	Single idler scale Dual load cells
Approvals	CE, C-TICK Stainless steel options meet USDA and FDA requirements for food processing	Stainless steel options meet USDA and FDA requirements for food processing	

¹⁾ Accuracy subject to: On factory approved installations the weigh feeder system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

Weighfeeders

Introduction

Technical specifications (continued)

SIEMENS

Weighfeeder Application Questionnaire

Customer information

Contact: _____ Prepared By: _____
 Company: _____ Date: _____
 Address: _____ Notes on the Application: _____
 City: _____ Country: _____
 State/Province: _____ Zip/Postal Code: _____
 Phone: (_____) _____ Fax: (_____) _____ E-mail: _____

Material

Material being measured: _____ Particle size: _____ mm/inch/mesh
 Bulk density: _____ Kg/m³ or lb/cu. ft. or t/m³ Moisture content: _____ %
 Temperature: _____ °C/°F Angle of repose: _____ degrees Surcharge angle: _____ degrees
 Material characteristics: sticky powder corrosive highly abrasive fluidizes

Pre-feed

(Supply sketch where possible)

 Sketch attached

Application: Load, speed, rate, and total Batch Control Ratio controlled blending
 Feed type: Rotary valve Belt Screw Vibratory pan Bin, hopper, or silo Other
 Hopper size: _____ ft³/m³
 Feed rate: _____ t/hr, kg/hr, lb/hr, LTPH, or STPH _____ min. _____ max. _____ nominal
 Accuracy required: +/- _____ % Hazardous classification at scale location: _____
 Condition of operating environment: Wash down Sanitary Corrosive Normal
 Duty cycle: _____ hours per day Material free fall height onto belt: _____

Weighfeeder

Space limitations: length: _____ width: _____ height: _____ mm/inch Requested belt width: _____ mm/inch
 Construction: open enclosed Quantity required: _____ Access side looking in direction of belt travel: left right
 Inlet dimensions: L x W: _____ mm/inch Centerline length: _____ mm/inch
inlet to discharge

Installation

(indicate all that apply)

Power available for motor: _____ volts _____ Hz

Inputs required:

4 ... 20 mA
 PID

Outputs required:

4 ... 20 mA Relays (#): _____
 PID Remote totalizer

Communications:

AB Remote I/O PROFIBUS DP SIMATIC S7 PLC
 DeviceNet RS-232 / RS-485 Modbus

Preferred Weighfeeder Model: WW100 WW200 WW300 Preferred Construction: Painted mild steel 304 SS 316 SS

Options: Belt tracking switches Safety pull cord switches Secondary speed sensor Start, stop, speed, controller

Gravity tensioned belt tracker (WW100/WW300) Shear curtain Belt cleaning brush


Open options: Discharge dust hood

Skirtboard covers

Enclosed options:

Bottom covers Dust tight seals Plugged discharge chute switch
 Skirtboard covers Dust extraction port Drag chain clean out conveyor

Overview

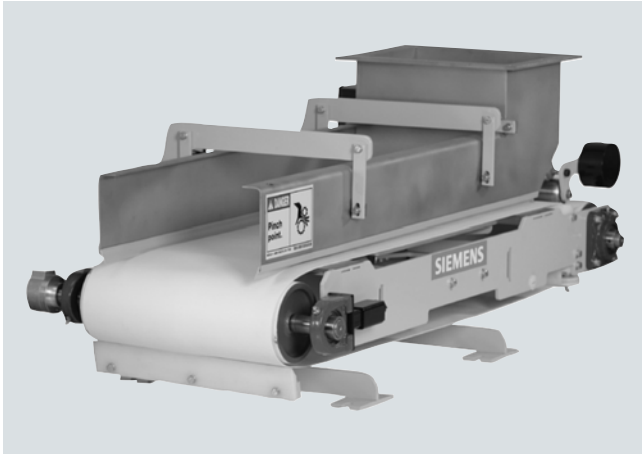

SITRANS WW100 is a high-accuracy, low-capacity weighfeeder used for minor ingredient additives.

Benefits

- High accuracy
- High turn down ratio 100 ... 10 % of capacity
- Corrosion resistant components
- Fast and easy belt removal for replacement or cleaning
- Simple installation, easy to clean and maintain
- Pre-programmed drive for servo motor control

Application

SITRANS WW100 is one of the most accurate in-motion weighing systems on the market. It is specially designed for high accuracy on light loading processes. The design eliminates material buildup to ensure accurate, reliable measurement.

The unique long length platform weigh bridge mounts directly to a corrosion-resistant platform load cell. An adjustable mechanical shear gate profiles the material and fixes the correct material bed depth for a given material particle size. The belt speed can be automatically adjusted to attain the correct feed rate.

Standard components include the belt weigh bridge, speed sensor, and test chains supported by Milltronics BW100, BW500, or SIWAREX FTC microprocessor-based integrators for easy blending, batching and feed rate control.

Weighfeeders

SITRANS weighfeeders

SITRANS WW100

Technical specifications

SITRANS WW100

Mode of operation

Measuring principle	Strain gauge load cell and digital speed sensor
Typical application	Control and monitor feed rates and blending in bulk chemicals, tobacco, food, and water treatment

Measuring accuracy

Accuracy ¹⁾	± 0.25 ... 0.5 %
Specified range	10 ... 100 % based on load
Design rate range	45 kg/h ... 18 t/h (100 lb/h ... 20 STPH)
Max volumetric flow	45 m ³ /h (1568 ft ³ /h)

Medium conditions

Operating temperature	-10 ... +55 °C (+10 ... +131 °F)
-----------------------	----------------------------------

Design

Material	Mild steel or stainless steel [304 (1.4301) or 316 (1.4401)] contact surfaces
Load cells	<ul style="list-style-type: none"> • One (1) single point, nickel plated platform IP66 (standard) • 17-4 PH (1.4568) stainless steel construction for corrosive and wash-down environments (optional) IP68
<ul style="list-style-type: none"> • Non-linearity • Non-repeatability 	± 0.03 % ± 0.02 %
Speed sensor	Optical encoder, driven pulley mounted
Framework	<ul style="list-style-type: none"> • Precision machined, stainless [304 (1.4301) or 316 (1.4401)] or mild steel • Cantilevered design for easy belt replacement

Pulleys	115 mm (4.5 inch) diameter, crowned and lagged
----------------	--

Belt speed	0.005 ... 0.36 m/s (1 ... 70 fpm)
-------------------	-----------------------------------

Belt support	Slider bed frame
---------------------	------------------

Belting	<ul style="list-style-type: none"> • Polyester carcass with polyurethane top cover and endless finger splice for maximum weighing consistency • Different belt styles for specific applications (optional)
----------------	--

Belt tension	Counter-weighted stainless steel [304 (1.4301) or 316 (1.4401)] tensioning idler for consistent tension, required for high accuracy weighing
---------------------	--

Belt cleaning	<ul style="list-style-type: none"> • UHMW blade type with counterweight at the head pulley for cleaning product side of belt • Return plow • Cleaning brush optional
----------------------	---

Drive motor

<ul style="list-style-type: none"> • 0.24 kW (0.32 HP) servo drive motor with direct coupled flange mounted gear reducer 45.6 Nm (404 lb), 2.1 service factor minimum (standard) • 0.09 kW (0.125 HP) AC drive motor with direct coupled flange mounted gear reducer 81 Nm (717 lb), 3.12 service factor minimum (optional)

Variable frequency drive: SINAMICS S110 servo motor controller (included with supply of WW100 based on ordering options)

<ul style="list-style-type: none"> • 1 ph, 200-240 V OR 3 ph, 380 ... 480 V • MMC with Factory loaded program for fast installation and commissioning • BOP for local control • External 24 V DC power supply • RS 232 connection port • 4 DI, D0 • PROFIBUS DP • Starter software & Connectin drawings provided with documentation

Shipping weight	91 kg (200 lb) ... 181 kg (400 lb) maximum
------------------------	--

Approvals	CE, C-TICK Stainless steel options meet USDA and FDA requirements for food processing
------------------	--

¹⁾ Accuracy subject to: On factory approved installations the weigh feeder system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

Weighfeeders

SITRANS weighfeeders

SITRANS WW100

Selection and Ordering data	Order No.	Order No.	
SITRANS WW100	L) 7MH7180-	L) 7MH7180-	
High accuracy solids weighfeeder for low capacity applications. Compact unit improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low capacity applications. Compact unit improves processing, increases efficiency and provides significant cost savings.	
<u>Add order code Y71-Y73 for all models to specify design data</u>			
Frame and Enclosure Construction			
Painted mild steel open style	0 A		
304 stainless steel open style	0 B		
316 stainless steel open style	0 D		
Painted mild steel enclosed style with painted mild steel enclosure	1 A		
304 stainless steel enclosed style with painted mild steel enclosure	1 B		
304 stainless steel enclosed style with 304 stainless steel enclosure	1 D		
316 stainless steel enclosed style with painted mild steel enclosure	1 G		
316 stainless steel enclosed style with 304 stainless steel enclosure	1 J		
316 stainless steel enclosed style with 316 stainless steel enclosure	1 M		
Material Containment Construction			
<u>Add order code Y74 and plain text: "Arc radius in inches ...XX.XXX inch" for options A-H</u>			
Shear gate inlet and skirtboards 304 stainless steel	A		
Shear gate inlet and skirtboards 304 stainless steel with cover	B		
Shear gate inlet and skirtboards 304 stainless steel, #4 polished	C		
Shear gate inlet and skirtboards 304 stainless steel, #4 polished with cover	D		
Shear gate inlet and skirtboards 316 stainless steel	E		
Shear gate inlet and skirtboards 316 stainless steel with cover	F		
Shear gate inlet and skirtboards 316 stainless steel, #4 polished	G		
Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	H		
Horseshoe inlet 304 stainless steel ¹⁾	J		
Horseshoe inlet 304 stainless steel, #4 polished ¹⁾	K		
Horseshoe inlet 316 stainless steel ¹⁾	L		
Horseshoe inlet 316 stainless steel, #4 polished ¹⁾	M		
Load cell			
10 kg (22 lb) nickel plated steel	0		
15 kg (33 lb) nickel plated steel	1		
20 kg (44 lb) nickel plated steel	2		
30 kg (66 lb) nickel plated steel	3		
6 kg (13.2 lb) stainless steel, hermetically sealed	4		
12 kg (26.5 lb) stainless steel, hermetically sealed	5		
30 kg (66.1 lb) stainless steel, hermetically sealed	6		
		SITRANS WW100	
		High accuracy solids weighfeeder for low capacity applications. Compact unit improves processing, increases efficiency and provides significant cost savings.	
		Speed Sensor	
		500 PPR shaft mounted optical encoder	0
		1000 PPR shaft mounted optical encoder	1
		2500 PPR shaft mounted optical encoder	2
		500 PPR shaft mounted optical encoder, stainless steel	3
		1000 PPR shaft mounted optical encoder, stainless steel	4
		2500 PPR shaft mounted optical encoder, stainless steel	5
		Drive configuration	
		<u>Sinamics servo motor and drive</u>	
		200 ... 240 V 1 ph ²⁾	0 A
		380 ... 480 V 3 ph ²⁾	0 B
		200 ... 240 V 1 ph, with 5 m (16.4 ft) communication and power cables	1 A
		380 ... 480 V 3 ph, with 5 m (16.4 ft) communication and power cables	1 B
		200 ... 240 V 1 ph, with 10 m (33 ft) communication and power cables	2 A
		380 ... 480 V 3 ph, with 10 m (33 ft) communication and power cables	2 B
		200 ... 240 V 1 ph, with 25 m (82 ft) communication and power cables	3 A
		380 ... 480 V 3 ph, with 25 m (82 ft) communication and power cables	3 B
		200 ... 240 V 1 ph, with 50 m (164 ft) communication and power cables	4 A
		380 ... 480 V 3 ph, with 50 m (164 ft) communication and power cables	4 B
		200 ... 240 V 1 ph, with 100 m (328 ft) communication and power cables	5 A
		380 ... 480 V 3 ph, with 100 m (328 ft) communication and power cables	5 B
		<u>Add order code Y75 reduction ratio in plain text: "X:1" for options 6A-7B, see "Reduction Ratio Selection Table" on page 5/6</u>	
		Standard AC motor without drive (Drive required for desired belt speed)	
		220 ... 240/380 ... 480 V 3 ph 50/60 Hz AC ³⁾	6 A
		575 V 3 ph 60 Hz AC ³⁾	6 B
		Food grade AC motor without drive (Drive required for desired belt speed)	
		220 ... 240/380 ... 480 V 3 ph 50/60 Hz AC epoxy coated gearmotor ³⁾	7 A
		575 V 3 ph 60 Hz AC epoxy coated gearmotor ³⁾	7 B
		Calibration Method	
		None	A
		1 calibration chain strand 2.41 kg/m (1.62 lb/ft)	B
		2 calibration chain strands 4.82 kg/m (3.24 lb/ft)	C
		3 calibration chain strands 7.23 kg/m (4.86 lb/ft)	D
		Design access side (from inlet to discharge)	
		Left hand	0
		Right hand	1

Weighfeeders

SITRANS weighfeeders

SITRANS WW100

Selection and Ordering data (continued)

Order No.

Further designs

Please add "-Z" to Order No. and specify Order code(s).

Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch)⁴⁾

Enter design units (TPH, MTPH, lb/h, kg/h)
Enter design speed (ft/m, m/s)

Enter design capacity/rate

AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6)

Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications⁴⁾

Pointek CLS100 Capacitance switch for plugged discharge chute detection

Siemens start/stop, auto/manual, speed control, hand held operator

Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt

Low weight belt for light loading, low rate applications (recommended for under 1 t/h). Thermo-plastic, 1 ply, anti-static, FDA, USDA approved

Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000

Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text

Discharge dust hood, painted mild steel with de-dust port¹⁾

Discharge dust hood, 304 stainless steel with de-dust port¹⁾

Discharge dust hood, 316 stainless steel with de-dust port¹⁾

Operating Instructions

English

French

German

Note: The operating instructions should be ordered as a separate item on the order.

This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.

Spare Parts

6 kg (13.2 lb) stainless steel load cell

12 kg (26.4 lb) stainless steel load cell

30 kg (66.2 lb) stainless steel load cell

10 kg (22 lb) nickel plated steel load cell

15 kg (33.1 lb) nickel plated steel load cell

20 kg (44 lb) nickel plated steel load cell

30 kg (66.2 lb) nickel plated steel load cell

500 PPR optical encoder⁵⁾

1000 PPR optical encoder⁵⁾

2500 PPR optical encoder⁵⁾

500 PPR optical encoder

1000 PPR optical encoder

2500 PPR optical encoder

Optical encoder connector

Optical encoder connector with 20 ft (6 m) of cable⁶⁾

Optical encoder connector with 20 ft (6 m) of cable⁷⁾

Order code

Y74

Y71

Y72

Y73

Y75

G11

G12

G13

G14

G15

C11

Y15

H50

H51

H52

Order No.

C) 7ML1998-5MN01

C) 7ML1998-5MN11

C) 7ML1998-5MN31

C) 7MH7725-1EG

C) 7MH7725-1EH

C) 7MH7725-1EJ

7MH7725-1EK

7MH7725-1EL

7MH7725-1EM

7MH7725-1EN

6FX2001-2PA50

6FX2001-2PB00

6FX2001-2PC50

6FX2001-4QA50

6FX2001-4QB00

6FX2001-4QC50

6FX2003-0SU12

7MH7723-1KM

7MH7723-1KD

500 PPR optical encoder, stainless steel (connector included)

1000 PPR optical encoder, stainless steel (connector included)

2500 PPR optical encoder, stainless steel (connector included)

1 calibration chain strand 2.41 kg/m (1.62 lb/ft) with mount and spacers (Corrosion resistant)

2 calibration chain strands 4.82 kg/m (3.24 lb/ft) with mount and spacers (Corrosion resistant)

3 calibration chain strands 7.23 kg/m (4.86 lb/ft) with mount and spacers (Corrosion resistant)

S110 Control Unit

S110 Basic operator panel (BOP)

S110 input choke 380-480 VAC

S110 power module 200-240 VAC 1 ph

S110 power module 380-480 VAC 3 ph

S110 memory card 200-240 VAC 1 ph

S110 memory card 380-480 VAC 3 ph

S110 power cable to servo gearmotor, 5 m (16.4 ft)

S110 communications cable to servo gearmotor, 5 m (16.4 ft)

S110 power cable to servo gearmotor, 10 m (32.8 ft)

S110 communications cable to servo gearmotor, 10 m (32.8 ft)

S110 power cable to servo gearmotor, 25 m (82 ft)

S110 communications cable to servo gearmotor, 25 m (82 ft)

S110 power cable to servo gearmotor, 50 m (164 ft)

S110 communications cable to servo gearmotor, 50 m (164 ft)

S110 power cable to servo gearmotor, 100 m (328 ft)

S110 communications cable to servo gearmotor, 100 m (328 ft)

Servo gearmotor

Belt

Termination box mild steel

Termination box stainless steel

Bearing replacement kit mild steel (includes C) 1 tail bearing, 2 head bearings)

Bearing replacement kit stainless steel (includes 1 tail bearing, 2 head bearings)

Belt contact replacement kit (includes C) 1 belt scraper blade, 2 belt plow blades, 2 belt guide rollers, 1 belt tension roller, belt skirtboard seal strips)

Pulley replacement kit mild steel (includes 1 drive pulley, 1 driven pulley)

Pulley replacement kit 304 stainless steel (includes 1 drive pulley, 1 driven pulley)

Order No.

7MH7723-1HG

C) 7MH7723-1HH

C) 7MH7723-1HJ

7MH7723-1HP

7MH7723-1HQ

7MH7723-1HR

M) 6SL3040-0JA00-0AA0

D) 6SL3055-0AA00-4BA0

C) 6SE6400-3CC00-2AD3

A) 6SL321-01SB12-3UA0

A) 6SL321-01SE11-3UA0

L) 7MH7723-1JH

L) 7MH7723-1JJ

6FX5002-5CG01-1AF0

6FX500-22DC10-1AF0

6FX50-025CG01-1BA0

6FX500-22DC10-1BA0

6FX500-25CG01-1CF0

6FX500-22DC10-1CF0

6FX500-25CG01-1FA0

6FX500-22DC10-1FA0

6FX5002-5CG01-2AA0

6FX5002-2DC10-2AA0

C) 1FK7032-5AK71-1UU7-Z E07 + G57 + H11 + Q90

C) 7MH7723-1JG

C) 7MH7723-1HS

C) 7MH7723-1HT

7MH7723-1HU

7MH7723-1HV

C) 7MH7723-1HW

7MH7723-1HX

7MH7723-1HY

Selection and Ordering data (continued)

	Order No.		Order No.
Accessories			
Start, Stop, Hand/Off/Auto, speed pot controller	C) 7MH7723-1JA	Siemens, MM420/440, Bop keypad	F) 6SE6400-0BP000AA0
E-stop push button enclosed style	3SB3801-0DF3	Siemens, G120, 0.5 HP/0.37 kW, 380 ... 480 V 3 ph	6SL3224-0137UA0
24 V Power supply, 4 A	6EP1332-1SH52	Siemens Control unit G120, STD RS 485	6SL3244-0BA10-0BA0
Power transformer 600 to 480 V AC 3 ph	7MH7726-1AV	VFC, Siemens, G120, Bop keypad	J) 6SL3255-0AA00-4BA1
Discharge dust hood Mild steel for open style units only	7MH7723-1JB	1) Available with Frame Construction options 0A to 0D only	
Discharge dust hood 304 stainless steel steel for open style units only	7MH7723-1JC	2) Communication and power cables required	
Discharge dust hood 316 stainless steel for open style units only	7MH7723-1JD	3) Available with open style construction options 0A to 0D	
CLS100 plugged discharge chute retrofit kit (includes CLS100, material hood)	D) 7MH7723-1JE	4) Available with Material Containment options A to H only	
Siemens, MM420, 0.5 HP/0.37 kW, 380 ... 480 V 3 ph 50/60 HZ	J) 6SE6420-2UD13-7AA1	5) For use with 5 V DC supply from RS422 circuit card	
Siemens, MM440, 0.5 HP/0.37 kW, 380 ... 480 V 3 ph 50/60 HZ	J) 6SE6440-2UD13-7AA1	6) For use with PPR optical encoders: 6FX20012PA50, 6FX20012PB00, 6FX20012PC50	
Siemens, MM440, 1 HP/0.75 kW, 500 to 600 V 3 ph 60HZ	J) 6SE6440-2UE17-5CA1	7) For use with PPR optical encoders: 6FX20014QA50, 6FX20014QB00, 6FX20014QC50	

A) Subject to export regulations AL: 9I999, ECCN: EAR99H.

C) Subject to export regulations AL: N, ECCN: EAR99.

D) Subject to export regulations AL: N, ECCN: EAR99H.

F) Subject to export regulations AL: 9I999, ECCN: N.

J) Subject to export regulations AL: 9I999, ECCN: EAR99.

L) Subject to export regulations AL: N, ECCN: 3A991X.

M) Subject to export regulations AL: 9I999, ECCN: EAR99APP.

Reduction ratio selection table

Reduction (X:1)	Speed	60 Hz fpm	60 Hz m/s	50 Hz fpm	50 Hz m/s
372:1	max.	5.54	0.028	4.59	0.023
	min.	0.55	0.003	0.45	0.002
303.36:1	max.	6.80	0.035	5.63	0.029
	min.	0.68	0.003	0.56	0.003
248:1	max.	8.31	0.042	6.89	0.035
	min.	0.83	0.004	0.69	0.003
202.24:1	max.	10.19	0.052	8.45	0.043
	min.	1.02	0.005	0.84	0.004
155:1	max.	13.30	0.068	11.02	0.056
	min.	1.33	0.007	1.10	0.006
126.4:1	max.	16.31	0.083	13.51	0.069
	min.	1.63	0.008	1.35	0.007
93:1	max.	22.17	0.113	18.37	0.093
	min.	2.22	0.011	1.84	0.009
75.84:1	max.	27.18	0.138	22.52	0.114
	min.	2.72	0.014	2.25	0.011
62:1	max.	33.25	0.169	27.55	0.140
	min.	3.33	0.017	2.76	0.014
50.56:1	max.	40.78	0.207	33.79	0.172
	min.	4.08	0.021	3.38	0.017
46.5:1	max.	44.34	0.225	36.74	0.187
	min.	4.43	0.023	3.67	0.019
37.92:1	max.	55.44	0.276	45.05	0.229
	min.	4.37	0.028	4.50	0.023
31:1	max.	66.51	0.338	55.10	0.280
	min.	6.65	0.034	5.51	0.028
25.28:1	max.	81.55	0.414	67.57	0.343
	min.	8.16	0.041	6.76	0.034


Weighfeeders

SITRANS weighfeeders


SITRANS WW100

Dimensional drawings

Open Construction

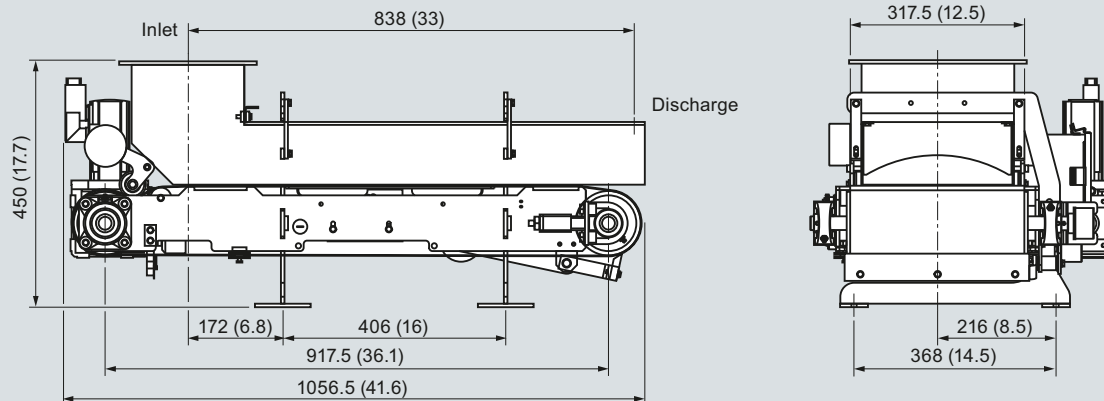


Open Horseshoe Inlet

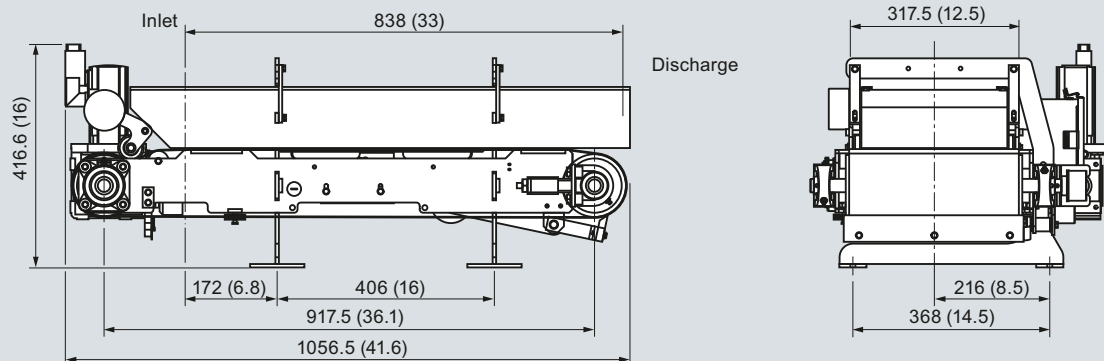


SITRANS WW100 dimensions in mm (inch)

Dimensional drawings (continued)

Open Dust Hood

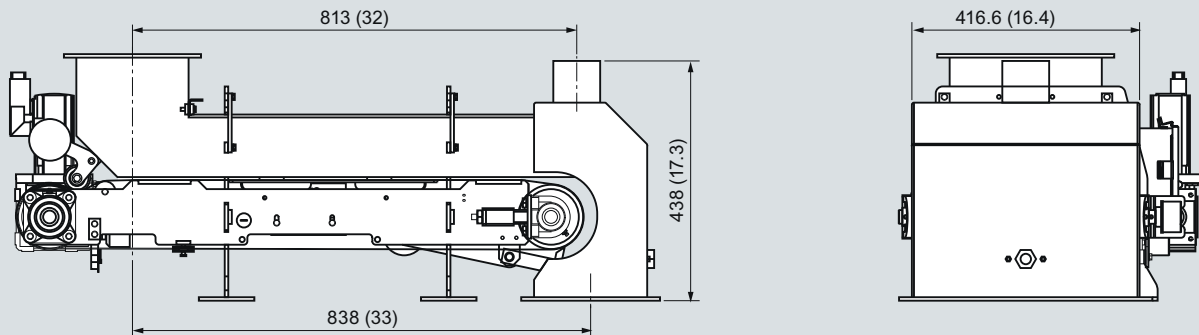

Enclosed Construction

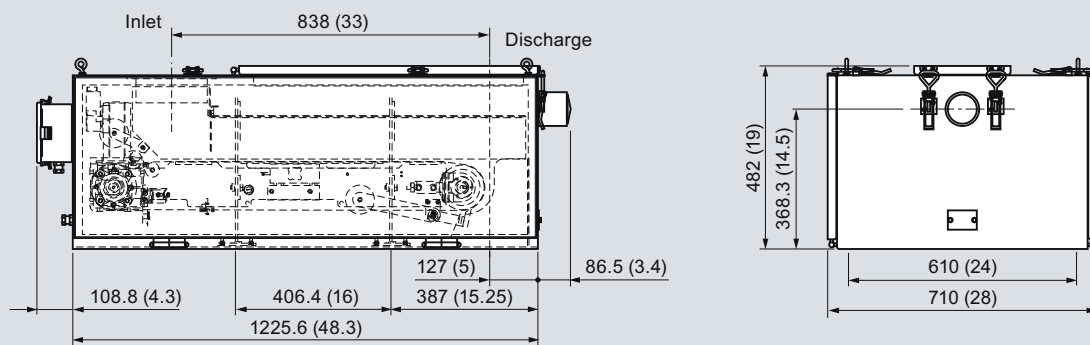

SITRANS WW100 dimensions in mm (inch)

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Overview



SITRANS WW200 is a low- to medium-capacity weighfeeder used for minor ingredient additives.

Benefits

- High accuracy
- Ideal for low- to medium-capacity loads
- Fast installation, easy to clean and maintain
- Flexible, rugged design allows configurations to suit many applications
- Quick delivery on standard units

Application

SITRANS WW200 has been field tested and proven in hundreds of applications.

The unit can be customized to meet exact application needs. Stainless or mild steel units are available in open or enclosed styles. Custom lengths, belt types, inlet configurations, drives, and other options are available to meet your requirements.

The MS (mild steel) model is ideal for use with chemicals, powders, or any granular product in applications not requiring wash-down. The SD (sanitary duty) model is designed for the food industry where high pressure wash-down is required. It meets all USDA and FDA requirements.

Its cantilevered mechanical design provides for quick belt removal and easy maintenance. It is designed to eliminate material build-up, ensuring high accuracy and reliability. The unique weigh system reduces dead load and applies live load directly to two platform load cells. Load cells are externally mounted for easy access and maintenance.

Standard components include the belt weigh bridge, speed sensor and test weights, supported by Milltronics BW100, BW500, or SIWAREX FTC microprocessor-based integrators for easy blending, batching and feed rate control.

Technical specifications

SITRANS WW200

Mode of operation

Measuring principle

Strain gauge load cells and digital speed sensor

Typical application

Control and monitor feed rates and blending of minerals or powdered additives into a process

Measuring accuracy	
Accuracy ¹⁾	± 0.5 % or better
Specified range	10 ... 100 % based on load
Design rate range	0.45 ... 100 t/h (1000 lb/h ... 110 STPH)
Max volumetric flow	220 m ³ /h (7700 ft ³ /h)
Medium conditions	
Operating temperature	-10 ... +55 °C (+14 ... +131 °F)
Design	
Material	Mild steel or stainless steel [304 (1.4301) or 316 (1.4401)]
Load cells	<ul style="list-style-type: none"> • Two (2) single point, nickel plated platform IP66 (standard) • 17-4 PH (1.4568) stainless steel construction for corrosive and washdown environments (optional) IP68
• Non-linearity	± 0.03 %
• Non-repeatability	± 0.02 %
Speed sensor	<ul style="list-style-type: none"> • Optical encoder (driven pulley mounted) • C-flange mounted magnetic pulse generator, adapted between motor flange and reducer input flange (optional)
Framework	<ul style="list-style-type: none"> • Precision machined, stainless [304 (1.4301) or 316 (1.4401)] or mild steel • Cantilevered design for easy belt replacement
Pulleys	152 mm (6 inch) diameter with 6 mm (¼ inch) neoprene lagging
Belt speed	0.005 ... 0.36 m/s (1 ... 70 fpm)
Belt support	Edge of flat bar eliminates material buildup
Belting	<ul style="list-style-type: none"> • Polyester carcass with polyurethane top cover and static control with vulcanized endless finger splice for maximum weighing consistency (standard) • Different belts for specific applications (optional)
Belt tension	Screw type, telescoper module with 150 mm (6 inch) travel - mild or stainless steel 304 (1.4301)
Belt cleaning	<ul style="list-style-type: none"> • UHMW blade type with spring tensioning at head pulley • Return plow • Cleaning brush optional
Drive motor	• TEFC/TENV, 208/230/380/460/575 V AC, three phase with flange mounted gear reducer
Shipping weight	280 kg (600 lb) minimum
Approvals	Stainless steel options meet USDA and FDA requirements for food processing

¹⁾ Accuracy subject to: On factory approved installations the weigh feeder system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7300-	SITRANS WW200	C) 7MH7300-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
Material containment construction		Drive configuration	
None	A	Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.	
Add order code Y74 and plain text: "Arc radius in inches ...XX.XXX inch" for options B-L		Standard AC motor	
Shear gate inlet and skirtboards AR400 steel	B	0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A
Shear gate inlet and skirtboards AR400 steel with cover	C	0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B
Shear gate inlet and skirtboards 304 stainless steel	D	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C
Shear gate inlet and skirtboards 304 stainless steel, with cover	E	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D
Shear gate inlet and skirtboards 304 stainless steel, #4 polished	F	0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E
Shear gate inlet and skirtboards 304 stainless steel, #4 polished with cover	G	0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F
Shear gate inlet and skirtboards 316 stainless steel	H	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G
Shear gate inlet and skirtboards 316 stainless steel, with cover	J	1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H
Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K	Food grade epoxy coated AC motor	
Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L	0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 A
Horseshoe inlet 304 stainless steel	M	0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	1 B
Horseshoe inlet 304 stainless steel, #4 polished	N	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 C
Horseshoe inlet 316 stainless steel	P	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	1 D
Horseshoe inlet 316 stainless steel, #4 polished	Q	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 E
		1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 F
Load cell		Stainless steel AC motor	
10 kg (22 lb) nickel plated steel	0	0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 A
15 kg (33 lb) nickel plated steel	1	0.33 HP (0.25 kW) 575 V 3 ph 60 Hz	2 B
20 kg (44 lb) nickel plated steel	2	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 C
30 kg (66 lb) nickel plated steel	3	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	2 D
50 kg (110 lb) nickel plated steel	4	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	2 E
6 kg (13.2 lb) stainless steel, hermetically sealed	5	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 F
12 kg (26.5 lb) stainless steel, hermetically sealed	6	1 HP (0.75 kW) 575 V 3 ph 60 Hz	
30 kg (66.1 lb) stainless steel, hermetically sealed	7		
Speed sensor		Belting	
500 PPR shaft mounted optical encoder	0	Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved	A
1 000 PPR shaft mounted optical encoder	1	Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved	B
2 500 PPR shaft mounted optical encoder	2	Polyurethane anti static 57 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved	C
500 PPR shaft mounted optical encoder, stainless steel	3	Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F)	D
1 000 PPR shaft mounted optical encoder, stainless steel	4	Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F)	E
2 500 PPR shaft mounted optical encoder, stainless steel	5	Silicone anti static 45 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	F
60 PPR motor mounted magnetic p/u	6	Nitrile 135 PIW, 3 ply	G
		Nitrile 135 PIW, 3 ply with B-section flange walls	H
		Nitrile 135 PIW, 3 ply with 2 inch (50 mm) corrugated side walls	J
		Design access side (from inlet to discharge)	
		Left hand	0
		Right hand	1

Selection and Ordering data (continued)

	Order No.		Order No.
<p>SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.</p>	C) 7MH7300-	<p>SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.</p>	C) 7MH7301-
<p>Further designs</p> <p>Please add "-Z" to Order No. and specify Order code(s).</p>	Order code	<p><u>Add order code Y71 - Y73 for all models to specify design data</u></p> <p><u>304 stainless steel steel open style</u></p>	
<p>Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch)¹⁾</p>	Y74	12 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	0 A
Enter design units (TPH, MTPH, lb/h, kg/h)	Y71	12 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	0 B
Enter design speed (ft/m, m/s)	Y72	12 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	0 C
Enter design capacity/rate	Y73	12 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	0 D
AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6)	Y75	12 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	0 E
Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters)	Y01	12 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	0 F
Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾	G11	12 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	0 G
Pointek CLS100 Capacitance switch for plugged discharge chute detection	G12	12 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	0 H
Siemens start/stop, auto/manual, speed control, hand held operator	G13	12 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	0 J
Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt	G14	18 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	1 A
Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only)	G16	18 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	1 B
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11	18 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	1 C
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15	18 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	1 D
discharge dust hood, painted mild steel with de-dust port	H50	18 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	1 E
discharge dust hood, 304 stainless steel with de-dust port	H51	18 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	1 F
discharge dust hood, 316 stainless steel with de-dust port	H52	18 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	1 G
		18 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	1 H
		18 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	1 J
		24 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	2 A
		24 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	2 B
		24 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	2 C
		24 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	2 D
		24 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	2 E
		24 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	2 F
		24 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	2 G
		24 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	2 H
		24 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	2 J
		30 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	3 A
		30 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	3 B
		30 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	3 C
<p>Operating Instructions</p> <p>English</p> <p>French</p> <p>German</p> <p>Note: The operating instructions should be ordered as a separate item on the order.</p> <p>This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.</p>	Order No.		
	C) 7ML1998-5MS01		
	C) 7ML1998-5MS11		
	C) 7ML1998-5MS31		

¹⁾ Available with Material Containment options B to L only

C) Subject to export regulations AL: N, ECCN: EAR99.

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7301-	SITRANS WW200	C) 7MH7301-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	■■■■■ - ■■■■	High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	■■■■■ - ■■■■
30 inch belt width, 76 inch (1930 mm) C/L Infeed to C/L discharge (2 LEGS)	3 D	Material Containment Construction	
30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E	None	A
30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F	Add order code Y74 and plain text: "Arc radius in inches ...XX.XXX" for options D-L	
30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G	Shear gate inlet and skirtboards 304 stainless steel	D
30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H	Shear gate inlet and skirtboards 304 stainless steel, with cover	E
30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J	Shear gate inlet and skirtboards 304 stainless steel, #4 polished	F
36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A	Shear gate inlet and skirtboards 304 stainless steel, #4 polished with cover	G
36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B	Shear gate inlet and skirtboards 316 stainless steel	H
36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C	Shear gate inlet and skirtboards 316 stainless steel, with cover	J
36 inch belt width, 76 inch (1930 mm) C/L Infeed to C/L discharge (2 LEGS)	4 D	Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K
36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E	Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L
36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F	Horseshoe inlet 304 stainless steel	M
36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G	Horseshoe inlet 304 stainless steel, #4 polished	N
36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H	Horseshoe inlet 316 stainless steel	P
36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J	Horseshoe inlet 316 stainless steel, #4 polished	Q
42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A	Load cell	
42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B	6 kg (13.2 lb) stainless steel, hermetically sealed	5
42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C	12 kg (26.5 lb) stainless steel, hermetically sealed	6
42 inch belt width, 76 inch (1930 mm) C/L Infeed to C/L discharge (2 LEGS)	5 D	30 kg (66.1 lb) stainless steel, hermetically sealed	7
42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E	Speed Sensor	
42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F	500 PPR shaft mounted optical encoder	0
42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G	1 000 PPR shaft mounted optical encoder	1
42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H	2 500 PPR shaft mounted optical encoder	2
42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J	500 PPR shaft mounted optical encoder, stainless steel	3
48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A	1 000 PPR shaft mounted optical encoder, stainless steel	4
48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B	2 500 PPR shaft mounted optical encoder, stainless steel	5
48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C	60 PPR motor mounted magnetic p/u	6
48 inch belt width, 76 inch (1930 mm) C/L Infeed to C/L discharge (2 LEGS)	6 D	Drive configuration	
48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E	Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.	
48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F	Standard AC motor	
48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G	0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A
48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H	0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B
48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C
		0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D
		0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E
		0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F
		1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G
		1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H
		Food grade epoxy coated AC motor	
		0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 A
		0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	1 B
		0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 C
		0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	1 D
		1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 E
		1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 F

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7MH7301-		C) 7MH7301-
Stainless steel AC motor 0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 0.33 HP (0.25 kW) 575 V 3 ph 60 Hz 0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 0.5 HP (0.37 kW) 575 V 3 ph 60 Hz 1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 1 HP (0.75 kW) 575 V 3 ph 60 Hz	2 A 2 B 2 C 2 D 2 E 2 F		Order code Y74 Y71 Y72 Y73 Y75
Belting Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved Polyurethane anti static 57 PIW, 2 ply with 2" (50 mm) corrugated side walls FDA/USDA approved Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F) Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F) Silicone anti static 45 PIW, 2 ply with 2" (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	A B C D E F		Y01 G11 G12 G13 G14 G16
Design access side (from inlet to discharge) Left hand Right hand	0 1		C11 Y15 H50 H51 H52
		Further designs Please add "-Z" to Order No. and specify Order code(s). Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx ¹) Enter design units (TPH, MTPH, lb/h, kg/h) Enter design speed (ft/m, m/s) Enter design capacity/rate AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6) Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters) Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾ Pointek CLS100 Capacitance switch for plugged discharge chute detection Siemens start/stop, auto/manual, speed control, hand held operator Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only) Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000 Stainless steel tag [69 x 50 mm (2.71 x 1.97")]: Measuring-point number/identification (max. 16 characters) specify in plain text Discharge dust hood, painted mild steel with de-dust port Discharge dust hood, 304 stainless steel with de-dust port Discharge dust hood, 316 stainless steel with de-dust port	Order No. C) 7ML1998-5MS01 C) 7ML1998-5MS11 C) 7ML1998-5MS31
		Operating Instructions English French German Note: The operating instructions should be ordered as a separate item on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.	

¹⁾ Available with Material Containment options D to L only

C) Subject to export regulations AL: N, ECCN: EAR99.

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7302-	SITRANS WW200	C) 7MH7302-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
<u>Add order code Y71 - Y73 for all models to specify design data</u>			
<u>316 stainless steel steel open style</u>			
12 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	0 A	30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E
12 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	0 B	30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F
12 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	0 C	30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G
12 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	0 D	30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H
12 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	0 E	30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J
12 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	0 F	36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A
12 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	0 G	36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B
12 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	0 H	36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C
12 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	0 J	36 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	4 D
18 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	1 A	36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E
18 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	1 B	36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F
18 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	1 C	36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G
18 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	1 D	36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H
18 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	1 E	36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J
18 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	1 F	42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A
18 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	1 G	42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B
18 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	1 H	42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C
18 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	1 J	42 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	5 D
24 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	2 A	42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E
24 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	2 B	42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F
24 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	2 C	42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G
24 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	2 D	42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H
24 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	2 E	42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J
24 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	2 F	48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A
24 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	2 G	48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B
24 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	2 H	48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C
24 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	2 J	48 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	6 D
30 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	3 A	48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E
30 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	3 B	48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F
30 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	3 C	48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G
30 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	3 D	48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H
		48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7302-	SITRANS WW200	C) 7MH7302-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
Material Containment Construction		Belting	
None	A	Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved	A
Add order code Y74 and plain text: "Arc radius in inches ...XX.XXX inch" for options H-L		Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved	B
Shear gate inlet and skirtboards 316 stainless steel	H	Polyurethane anti static 57 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved	C
Shear gate inlet and skirtboards 316 stainless steel, with cover	J	Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F)	D
Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K	Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F)	E
Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L	Silicone anti static 45 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	F
Horseshoe inlet 316 stainless steel	P		
Horseshoe inlet 316 stainless steel, #4 polished	Q	Design access side (from inlet to discharge)	
Load cell		Left hand	0
6 kg (13.2 lb) stainless steel, hermetically sealed	5	Right hand	1
12 kg (26.5 lb) stainless steel, hermetically sealed	6		
30 kg (66.1 lb) stainless steel, hermetically sealed	7		
Speed Sensor		C) Subject to export regulations AL: N, ECCN: EAR99.	
500 PPR shaft mounted optical encoder	0		
1 000 PPR shaft mounted optical encoder	1		
2 500 PPR shaft mounted optical encoder	2		
500 PPR shaft mounted optical encoder, stainless steel	3		
1 000 PPR shaft mounted optical encoder, stainless steel	4		
2 500 PPR shaft mounted optical encoder, stainless steel	5		
60 PPR motor mounted magnetic p/u	6		
Drive configuration			
Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.			
<u>Standard AC motor</u>			
0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A		
0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B		
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C		
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D		
0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E		
0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F		
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G		
1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H		
<u>Food grade epoxy coated AC motor</u>			
0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 A		
0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	1 B		
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 C		
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	1 D		
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 E		
1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 F		
<u>Stainless steel AC motor</u>			
0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 A		
0.33 HP (0.25 kW) 575 V 3 ph 60 Hz	2 B		
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 C		
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	2 D		
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 E		
1 HP (0.75 kW) 575 V 3 ph 60 Hz	2 F		

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

		Order No.
Further designs	Order code	SITRANS WW200 C) 7MH7303-
Please add "-Z" to Order No. and specify Order code(s).		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.
Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch) ¹⁾	Y74	<u>Add order code Y71 - Y73 for all models to specify design data</u>
Enter design units (TPH,MTPH, lb/h, kg/h)	Y71	<u>Painted mild steel frame with painted mild steel enclosure style</u>
Enter design speed (ft/m, m/s)	Y72	12 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS) 0 A
Enter design capacity/rate	Y73	12 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS) 0 B
AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6)	Y75	12 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS) 0 C
Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters)	Y01	12 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS) 0 D
Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾	G11	12 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS) 0 E
Pointek CLS100 Capacitance switch for plugged discharge chute detection	G12	12 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS) 0 F
Siemens start/stop, auto/manual, speed control, hand held operator	G13	12 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS) 0 G
Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt	G14	12 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS) 0 H
Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only)	G16	12 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS) 0 J
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11	18 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS) 1 A
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15	18 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS) 1 B
Discharge dust hood, painted mild steel with de-dust port	H50	18 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS) 1 C
Discharge dust hood, 304 stainless steel with de-dust port	H51	18 inch belt width, 76 inch (1930 mm) C/L Infeed to C/L discharge (2 LEGS) 1 D
Discharge dust hood, 316 stainless steel with de-dust port	H52	18 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS) 1 E
Operating Instructions	Order No.	18 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS) 1 F
English	C) 7ML1998-5MS01	18 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS) 1 G
French	C) 7ML1998-5MS11	18 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS) 1 H
German	C) 7ML1998-5MS31	18 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS) 1 J
Note: The operating instructions should be ordered as a separate item on the order.		24 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS) 2 A
This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.		24 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS) 2 B
¹⁾ Available with Material Containment options H to L only		24 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS) 2 C
C) Subject to export regulations AL: N, ECCN: EAR99.		24 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS) 2 D
		24 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS) 2 E
		24 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS) 2 F
		24 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS) 2 G
		24 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS) 2 H
		24 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS) 2 J
		30 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS) 3 A
		30 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS) 3 B
		30 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS) 3 C
		30 inch belt width, 76 inch (1930 mm) C/L Infeed to C/L discharge (2 LEGS) 3 D

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7303-	SITRANS WW200	C) 7MH7303-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
Material Containment Construction		Material Containment Construction	
<u>Add order code Y74 and plain text: inchArc radius in inches ...XX.XXX inch inch for options B-L</u>		<u>Add order code Y74 and plain text: inchArc radius in inches ...XX.XXX inch inch for options B-L</u>	
30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E	Shear gate inlet and skirtboards AR400 steel	B
30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F	Shear gate inlet and skirtboards AR400 steel with cover	C
30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G	Shear gate inlet and skirtboards 304 stainless steel	D
30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H	Shear gate inlet and skirtboards 304 stainless steel, with cover	E
30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J	Shear gate inlet and skirtboards 304 stainless steel, #4 polished	F
36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A	Shear gate inlet and skirtboards 304 stainless steel, #4 polished with cover	G
36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B	Shear gate inlet and skirtboards 316 stainless steel	H
36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C	Shear gate inlet and skirtboards 316 stainless steel, with cover	J
36 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	4 D	Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K
36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E	Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L
36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F		
36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G	Load cell	
36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H	10 kg (22 lb) nickel plated steel	0
36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J	15 kg (33 lb) nickel plated steel	1
42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A	20 kg (44 lb) nickel plated steel	2
42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B	30 kg (66 lb) nickel plated steel	3
42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C	50 kg (110 lb) nickel plated steel	4
42 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	5 D	6 kg (13.2 lb) stainless steel, hermetically sealed	5
42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E	12 kg (26.5 lb) stainless steel, hermetically sealed	6
42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F	30 kg (66.1 lb) stainless steel, hermetically sealed	7
42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G		
42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H	Speed Sensor	
42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J	500 PPR shaft mounted optical encoder	0
48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A	1 000 PPR shaft mounted optical encoder	1
48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B	2 500 PPR shaft mounted optical encoder	2
48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C	500 PPR shaft mounted optical encoder, stainless steel	3
48 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	6 D	1 000 PPR shaft mounted optical encoder, stainless steel	4
48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E	2 500 PPR shaft mounted optical encoder, stainless steel	5
48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F	60 PPR motor mounted magnetic p/u	6
48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G		
48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H	Drive configuration	
48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J	<u>Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.</u>	
		<u>Standard AC motor</u>	
		0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A
		0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B
		0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C
		0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D
		0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E
		0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F
		1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G
		1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H

Selection and Ordering data (continued)

Order No.		Order No.	
SITRANS WW200	C) 7MH7304-	SITRANS WW200	C) 7MH7304-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
<u>Add order code Y71 - Y73 for all models to specify design data</u>		30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E
<u>304 stainless steel frame with painted mild steel enclosure style</u>		30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F
12 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	0 A	30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G
12 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	0 B	30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H
12 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	0 C	30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J
12 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	0 D	36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A
12 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	0 E	36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B
12 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	0 F	36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C
12 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	0 G	36 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	4 D
12 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	0 H	36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E
12 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	0 J	36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F
18 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	1 A	36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G
18 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	1 B	36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H
18 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	1 C	36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J
18 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	1 D	42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A
18 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	1 E	42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B
18 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	1 F	42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C
18 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	1 G	42 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	5 D
18 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	1 H	42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E
18 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	1 J	42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F
24 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	2 A	42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G
24 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	2 B	42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H
24 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	2 C	42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J
24 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	2 D	48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A
24 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	2 E	48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B
24 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	2 F	48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C
24 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	2 G	48 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	6 D
24 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	2 H	48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E
24 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	2 J	48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F
30 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	3 A	48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G
30 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	3 B	48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H
30 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	3 C	48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J
30 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	3 D		

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7304-	SITRANS WW200	C) 7MH7304-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
Material Containment Construction		Food grade epoxy coated AC motor	
Add order code Y74 and plain text: <u>inchArc radius in inches ...XX.XXX inch</u> for options D-L		0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 A
Shear gate inlet and skirtboards AR400 steel	B	0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	1 B
Shear gate inlet and skirtboards AR400 steel with cover	C	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 C
Shear gate inlet and skirtboards 304 stainless steel	D	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	1 D
Shear gate inlet and skirtboards 304 stainless steel, with cover	E	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 E
Shear gate inlet and skirtboards 304 stainless steel, #4 polished	F	1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 F
Shear gate inlet and skirtboards 304 stainless steel, #4 polished with cover	G	Stainless steel AC motor	
Shear gate inlet and skirtboards 316 stainless steel	H	0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 A
Shear gate inlet and skirtboards 316 stainless steel, with cover	J	0.33 HP (0.25 kW) 575 V 3 ph 60 Hz	2 B
Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 C
Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	2 D
		1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 E
		1 HP (0.75 kW) 575 V 3 ph 60 Hz	2 F
Load cell		Belting	
10 kg (22 lb) nickel plated steel	0	Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved	A
15 kg (33 lb) nickel plated steel	1	Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved	B
20 kg (44 lb) nickel plated steel	2	Polyurethane anti static 57 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved	C
30 kg (66 lb) nickel plated steel	3	Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F)	D
50 kg (110 lb) nickel plated steel	4	Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F)	E
6 kg (13.2 lb) stainless steel, hermetically sealed	5	Silicone anti static 45 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	F
12 kg (26.5 lb) stainless steel, hermetically sealed	6		
30 kg (66.1 lb) stainless steel, hermetically sealed	7	Design access side (from inlet to discharge)	
Speed Sensor		Left hand	0
500 PPR shaft mounted optical encoder	0	Right hand	1
1 000 PPR shaft mounted optical encoder	1		
2 500 PPR shaft mounted optical encoder	2		
500 PPR shaft mounted optical encoder, stainless steel	3		
1 000 PPR shaft mounted optical encoder, stainless steel	4		
2 500 PPR shaft mounted optical encoder, stainless steel	5		
60 PPR motor mounted magnetic p/u	6		
Drive configuration			
Add order code Y75 reduction ratio in plain text: <u>"X:1"</u> See table 1 for further info			
Standard AC motor			
0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A		
0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B		
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C		
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D		
0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E		
0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F		
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G		
1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H		

Selection and Ordering data (continued)	Order No.	Order No.
SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7MH7304-	C) 7MH7305-
Further designs	Order code	
Please add "-Z" to Order No. and specify Order code(s).		
Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch) ¹⁾	Y74	0 A
Enter design units (TPH, MTPH, lb/h, kg/h)	Y71	0 B
Enter design speed (ft/m, m/s)	Y72	0 C
Enter design capacity/rate	Y73	0 D
AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6)	Y75	0 E
Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters)	Y01	0 F
Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾	G11	0 G
Pointek CLS100 Capacitance switch for plugged discharge chute detection	G12	0 H
Siemens start/stop, auto/manual, speed control, hand held operator	G13	0 J
Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt	G14	1 A
Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only)	G16	1 B
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11	1 C
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15	1 D
Operating Instructions	Order No.	1 E
English	C) 7ML1998-5MS01	1 F
French	C) 7ML1998-5MS11	1 G
German	C) 7ML1998-5MS31	1 H
Note: The operating instructions should be ordered as a separate item on the order.		1 J
This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.		2 A
		2 B
		2 C
		2 D
		2 E
		2 F
		2 G
		2 H
		2 J
		3 A
		3 B
		3 C
		3 D

¹⁾ Available with Material Containment options D to L only

C) Subject to export regulations AL: N, ECCN: EAR99.

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7305-	SITRANS WW200	C) 7MH7305-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E	Material Containment Construction	
30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F	Add order code Y74 and plain text: "Arc radius in inches ...XX.XXX inch" for options D-L	
30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G	Shear gate inlet and skirtboards 304 stainless steel	D
30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H	Shear gate inlet and skirtboards 304 stainless steel, with cover	E
30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J	Shear gate inlet and skirtboards 304 stainless steel, #4 polished	F
36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A	Shear gate inlet and skirtboards 304 stainless steel, #4 polished with cover	G
36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B	Shear gate inlet and skirtboards 316 stainless steel	H
36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C	Shear gate inlet and skirtboards 316 stainless steel, with cover	J
36 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	4 D	Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K
36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E	Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L
36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F	Load cell	
36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G	6 kg (13.2 lb) stainless steel, hermetically sealed	5
36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H	12 kg (26.5 lb) stainless steel, hermetically sealed	6
36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J	30 kg (66.1 lb) stainless steel, hermetically sealed	7
42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A	Speed Sensor	
42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B	500 PPR shaft mounted optical encoder	0
42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C	1 000 PPR shaft mounted optical encoder	1
42 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	5 D	2 500 PPR shaft mounted optical encoder	2
42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E	500 PPR shaft mounted optical encoder, stainless steel	3
42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F	1 000 PPR shaft mounted optical encoder, stainless steel	4
42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G	2 500 PPR shaft mounted optical encoder, stainless steel	5
42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H	60 PPR motor mounted magnetic p/u	6
42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J	Drive configuration	
48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A	Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.	
48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B	Standard AC motor	
48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C	0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A
48 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	6 D	0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B
48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C
48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D
48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G	0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E
48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H	0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F
48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G
		1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7305-		C) 7ML7305-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.			
Food grade epoxy coated AC motor			Order code
0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 A		
0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	1 B		
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 C		
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	1 D		
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 E		
1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 F		
Stainless steel AC motor			
0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 A		
0.33 HP (0.25 kW) 575 V 3 ph 60 Hz	2 B		
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 C		
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	2 D		
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 E		
1 HP (0.75 kW) 575 V 3 ph 60 Hz	2 F		
Belting			
Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved	A		
Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved	B		
Polyurethane anti static 57 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved	C		
Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F)	D		
Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F)	E		
Silicone anti static 45 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	F		
Design access side (from inlet to discharge)			
Left hand	0		
Right hand	1		
SITRANS WW200			C) 7ML7305-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.			
Further designs			Order code
Please add "-Z" to Order No. and specify Order code(s).			
Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch) ¹⁾			Y74
Enter design units (TPH, MTPH, lb/h, kg/h)			Y71
Enter design speed (ft/m, m/s)			Y72
Enter design capacity/rate			Y73
AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6)			Y75
Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters)			Y01
Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾			G11
Pointek CLS100 Capacitance switch for plugged discharge chute detection			G12
Siemens start/stop, auto/manual, speed control, hand held operator			G13
Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt			G14
Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only)			G16
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000			C11
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text			Y15
Operating Instructions			Order No.
English			C) 7ML1998-5MS01
French			C) 7ML1998-5MS11
German			C) 7ML1998-5MS31
Note: The operating instructions should be ordered as a separate item on the order.			
This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.			

¹⁾ Available with Material Containment options D to L only

C) Subject to export regulations AL: N, ECCN: EAR99.

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7306-	SITRANS WW200	C) 7MH7306-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
<u>Add order code Y71 - Y73 for all models to specify design data</u>			
<u>316 stainless steel frame with painted mild steel enclosure style</u>			
12 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	0 A	30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E
12 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	0 B	30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F
12 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	0 C	30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G
12 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	0 D	30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H
12 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	0 E	30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J
12 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	0 F	36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A
12 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	0 G	36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B
12 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	0 H	36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C
12 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	0 J	36 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	4 D
18 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	1 A	36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E
18 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	1 B	36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F
18 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	1 C	36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G
18 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	1 D	36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H
18 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	1 E	36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J
18 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	1 F	42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A
18 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	1 G	42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B
18 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	1 H	42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C
18 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	1 J	42 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	5 D
24 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	2 A	42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E
24 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	2 B	42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F
24 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	2 C	42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G
24 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	2 D	42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H
24 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	2 E	42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J
24 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	2 F	48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A
24 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	2 G	48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B
24 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	2 H	48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C
24 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	2 J	48 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	6 D
30 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	3 A	48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E
30 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	3 B	48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F
30 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	3 C	48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G
30 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	3 D	48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H
		48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J

Selection and Ordering data (continued)

	Order No.
SITRANS WW200	C) 7MH7306-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
<u>Add order code Y74 and plain text: "Arc radius in inches ...XX.XXX" for options H-L</u>	
Shear gate inlet and skirtboards 316 stainless steel	H
Shear gate inlet and skirtboards 316 stainless steel, with cover	J
Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K
Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L
Load cell	
6 kg (13.2 lb) stainless steel, hermetically sealed	5
12 kg (26.5 lb) stainless steel, hermetically sealed	6
30 kg (66.1 lb) stainless steel, hermetically sealed	7
Speed Sensor	
500 PPR shaft mounted optical encoder	0
1 000 PPR shaft mounted optical encoder	1
2 500 PPR shaft mounted optical encoder	2
500 PPR shaft mounted optical encoder, stainless steel	3
1 000 PPR shaft mounted optical encoder, stainless steel	4
2 500 PPR shaft mounted optical encoder, stainless steel	5
60 PPR motor mounted magnetic p/u	6
Drive configuration	
<u>Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.</u>	
<u>Standard AC motor</u>	
0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A
0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D
0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E
0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G
1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H
<u>Food grade epoxy coated AC motor</u>	
0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 A
0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	1 B
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 C
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	1 D
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 E
1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 F
<u>Stainless steel AC motor</u>	
0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 A
0.33 HP (0.25 kW) 575 V 3 ph 60 Hz	2 B
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 C
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	2 D
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 E
1 HP (0.75 kW) 575 V 3 ph 60 Hz	2 F

	Order No.
SITRANS WW200	C) 7MH7306-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
Belting	
Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved	A
Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved	B
Polyurethane anti static 57 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved	C
Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F)	D
Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F)	E
Silicone anti static 45 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	F
Design access side (from inlet to discharge)	
Left hand	0
Right hand	1

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7ML7306-	SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7MH7307-
Further designs Please add "-Z" to Order No. and specify Order code(s).	Order code	Add order code Y71 - Y73 for all models to specify <u>design data</u> <u>316 stainless steel frame with 304 stainless steel enclosure style</u>	
Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch) ¹⁾	Y74	12 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	0 A
Enter design units (TPH, MTPH, lb/h, kg/h)	Y71	12 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	0 B
Enter design speed (ft/m, m/s)	Y72	12 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	0 C
Enter design capacity/rate	Y73	12 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	0 D
AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6)	Y75	12 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	0 E
Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters)	Y01	12 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	0 F
Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾	G11	12 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	0 G
Pointek CLS100 Capacitance switch for plugged discharge chute detection	G12	12 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	0 H
Siemens start/stop, auto/manual, speed control, hand held operator	G13	12 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	0 J
Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt	G14	18 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	1 A
Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only)	G16	18 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	1 B
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11	18 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	1 C
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15	18 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	1 D
		18 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	1 E
		18 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	1 F
		18 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	1 G
		18 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	1 H
		18 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	1 J
		24 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	2 A
		24 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	2 B
		24 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	2 C
		24 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	2 D
		24 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	2 E
		24 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	2 F
		24 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	2 G
		24 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	2 H
		24 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	2 J
		30 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	3 A
		30 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	3 B
		30 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	3 C
		30 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	3 D
Operating Instructions English French German Note: The operating instructions should be ordered as a separate item on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.	Order No.		
	C) 7ML1998-5MS01		
	C) 7ML1998-5MS11		
	C) 7ML1998-5MS31		

¹⁾ Available with Material Containment options H to L only

C) Subject to export regulations AL: N, ECCN: EAR99.

Selection and Ordering data (continued)

Order No.		Order No.	
SITRANS WW200	C) 7MH7307-	SITRANS WW200	C) 7MH7307-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E	Material Containment Construction	
30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F	Add order code Y74 and plain text: "Arc radius in inches ...XX.XXX inch" for options H-L	
30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G	Shear gate inlet and skirtboards 316 stainless steel	H
30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H	Shear gate inlet and skirtboards 316 stainless steel, with cover	J
30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J	Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K
36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A	Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L
36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B	Load cell	
36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C	6 kg (13.2 lb) stainless steel, hermetically sealed	5
36 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	4 D	12 kg (26.5 lb) stainless steel, hermetically sealed	6
36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E	30 kg (66.1 lb) stainless steel, hermetically sealed	7
36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F	Speed Sensor	
36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G	500 PPR shaft mounted optical encoder	0
36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H	1 000 PPR shaft mounted optical encoder	1
36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J	2 500 PPR shaft mounted optical encoder	2
42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A	500 PPR shaft mounted optical encoder, stainless steel	3
42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B	1 000 PPR shaft mounted optical encoder, stainless steel	4
42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C	2 500 PPR shaft mounted optical encoder, stainless steel	5
42 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	5 D	60 PPR motor mounted magnetic p/u	6
42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E	Drive configuration	
42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F	Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.	
42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G	<u>Standard AC motor</u>	
42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H	0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A
42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J	0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B
48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C
48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D
48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C	0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E
48 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	6 D	0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F
48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G
48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F	1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H
48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G		
48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H		
48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J		

Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7MH7307-		C) 7MH7307-
Food grade epoxy coated AC motor 0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 0.25 HP (0.19 kW) 575 V 3 ph 60 Hz 0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 0.5 HP (0.37 kW) 575 V 3 ph 60 Hz 1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 A 1 B 1 C 1 D 1 E 1 F		SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.
Stainless steel AC motor 0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 0.33 HP (0.25 kW) 575 V 3 ph 60 Hz 0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 0.5 HP (0.37 kW) 575 V 3 ph 60 Hz 1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz 1 HP (0.75 kW) 575 V 3 ph 60 Hz	2 A 2 B 2 C 2 D 2 E 2 F		Further designs Please add "-Z" to Order No. and specify Order code(s). Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch) ¹⁾ Enter design units (TPH, MTPH, lb/h, kg/h) Enter design speed (ft/m, m/s) Enter design capacity/rate AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6) Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters) Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾ Pointek CLS100 Capacitance switch for plugged discharge chute detection Siemens start/stop, auto/manual, speed control, hand held operator Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only) Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000 Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text
Order code Y74 Y71 Y72 Y73 Y75 Y01 G11 G12 G13 G14 G16 C11 Y15			
Belting Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved Polyurethane anti static 57 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F) Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F) Silicone anti static 45 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	A B C D E F		Operating Instructions <ul style="list-style-type: none"> English French German Note: The operating instructions should be ordered as a separate item on the order.
Design access side (from inlet to discharge) Left hand Right hand	0 1		Order No. C) 7ML1998-5MS01 C) 7ML1998-5MS11 C) 7ML1998-5MS31
			This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.

¹⁾ Available with Material Containment options H to L only

C) Subject to export regulations AL: N, ECCN: EAR99.

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7MH7308-	SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7MH7308-
<u>Add order code Y71 - Y73 for all models to specify design data</u>		30 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	3 E
<u>316 stainless steel frame with 316 stainless steel enclosure style</u>		30 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	3 F
12 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	0 A	30 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	3 G
12 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	0 B	30 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	3 H
12 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	0 C	30 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	3 J
12 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	0 D	36 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	4 A
12 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	0 E	36 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	4 B
12 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	0 F	36 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	4 C
12 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	0 G	36 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	4 D
12 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	0 H	36 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	4 E
12 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	0 J	36 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	4 F
18 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	1 A	36 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	4 G
18 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	1 B	36 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	4 H
18 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	1 C	36 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	4 J
18 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	1 D	42 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	5 A
18 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	1 E	42 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	5 B
18 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	1 F	42 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	5 C
18 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	1 G	42 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	5 D
18 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	1 H	42 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	5 E
18 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	1 J	42 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	5 F
24 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	2 A	42 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	5 G
24 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	2 B	42 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	5 H
24 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	2 C	42 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	5 J
24 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	2 D	48 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	6 A
24 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	2 E	48 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	6 B
24 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	2 F	48 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	6 C
24 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	2 G	48 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	6 D
24 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	2 H	48 inch belt width, 84 inch (2134 mm) C/L infeed to C/L discharge (2 LEGS)	6 E
24 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	2 J	48 inch belt width, 92 inch (2337 mm) C/L infeed to C/L discharge (3 LEGS)	6 F
30 inch belt width, 52 inch (1321 mm) C/L infeed to C/L discharge (2 LEGS)	3 A	48 inch belt width, 100 inch (2540 mm) C/L infeed to C/L discharge (3 LEGS)	6 G
30 inch belt width, 60 inch (1524 mm) C/L infeed to C/L discharge (2 LEGS)	3 B	48 inch belt width, 108 inch (2743 mm) C/L infeed to C/L discharge (3 LEGS)	6 H
30 inch belt width, 68 inch (1727 mm) C/L infeed to C/L discharge (2 LEGS)	3 C	48 inch belt width, 116 inch (2946 mm) C/L infeed to C/L discharge (3 LEGS)	6 J
30 inch belt width, 76 inch (1930 mm) C/L infeed to C/L discharge (2 LEGS)	3 D		


Weighfeeders

SITRANS weighfeeders

SITRANS WW200

Selection and Ordering data (continued)

	Order No.		Order No.
SITRANS WW200	C) 7MH7308-	SITRANS WW200	C) 7MH7308-
High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.		High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	
Material Containment Construction		Food grade epoxy coated AC motor	
Add order code Y74 and plain text: *Arc radius in inches ...XX.XXX inch* for options H-L		0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 A
Shear gate inlet and skirtboards 316 stainless steel	H	0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	1 B
Shear gate inlet and skirtboards 316 stainless steel, with cover	J	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 C
Shear gate inlet and skirtboards 316 stainless steel, #4 polished	K	0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	1 D
Shear gate inlet and skirtboards 316 stainless steel, #4 polished with cover	L	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	1 E
		1 HP (0.75 kW) 575 V 3 ph 60 Hz	1 F
Load cell		Stainless steel AC motor	
6 kg (13.2 lb) stainless steel, hermetically sealed	5	0.33 HP (0.25 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 A
12 kg (26.5 lb) stainless steel, hermetically sealed	6	0.33 HP (0.25 kW) 575 V 3 ph 60 Hz	2 B
30 kg (66.1 lb) stainless steel, hermetically sealed	7	0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 C
Speed Sensor		0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	2 D
500 PPR shaft mounted optical encoder	0	1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	2 E
1 000 PPR shaft mounted optical encoder	1	1 HP (0.75 kW) 575 V 3 ph 60 Hz	2 F
2 500 PPR shaft mounted optical encoder	2		
500 PPR shaft mounted optical encoder, stainless steel	3	Belting	
1 000 PPR shaft mounted optical encoder, stainless steel	4	Polyurethane anti static 57 PIW, 2 ply FDA/USDA approved	A
2 500 PPR shaft mounted optical encoder, stainless steel	5	Polyurethane anti static 57 PIW, 2 ply with B-section flange walls FDA/USDA approved	B
60 PPR motor mounted magnetic p/u	6	Polyurethane anti static 57 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved	C
		Silicone anti static 45 PIW, 2 ply FDA/USDA approved HT 177 °C (350 °F)	D
Drive configuration		Silicone anti static 45 PIW, 2 ply with B-section flange walls FDA/USDA approved HT 177 °C (350 °F)	E
Add order code Y75 reduction ratio in plain text: "X:1" See table 1 for further info.		Silicone anti static 45 PIW, 2 ply with 2 inch (50 mm) corrugated side walls FDA/USDA approved HT 177 °C (350 °F)	F
Standard AC motor		Design access side (from inlet to discharge)	
0.25 HP (0.19 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 A	Left hand	0
0.25 HP (0.19 kW) 575 V 3 ph 60 Hz	0 B	Right hand	1
0.5 HP (0.37 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 C		
0.5 HP (0.37 kW) 575 V 3 ph 60 Hz	0 D		
0.75 HP (0.56 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 E		
0.75 HP (0.56 kW) 575 V 3 ph 60 Hz	0 F		
1 HP (0.75 kW) 220 ... 240/380 ... 480 V 3 ph 50/60 Hz	0 G		
1 HP (0.75 kW) 575 V 3 ph 60 Hz	0 H		

Selection and Ordering data (continued)	Order No.
SITRANS WW200 High accuracy solids weighfeeder for low to medium capacity applications. Improves processing, increases efficiency and provides significant cost savings.	C) 7MH7308- 
Further designs Please add "-Z" to Order No. and specify Order code(s).	Order code
Shear gate arc radius: Enter Shear gate arc radius in inches (xxx.xx inch) ¹⁾	Y74
Enter design units (TPH, MTPH, lb/h, kg/h)	Y71
Enter design speed (ft/m, m/s)	Y72
Enter design capacity/rate	Y73
AC gearmotor reduction ratio: enter reduction ratio in plain text (X:1) (see "Reduction Ratio Selection Table" on page 5/6)	Y75
Custom length: select next longest option and specify infeed CL to discharge CL in plain text (indicated inches or millimeters)	Y01
Plastic shear curtain to control dust at the infeed for floodable materials and dusty applications ¹⁾	G11
Pointek CLS100 Capacitance switch for plugged discharge chute detection	G12
Siemens start/stop, auto/manual, speed control, hand held operator	G13
Belt cleaner, stainless steel, nylon brush, mounted under belt plow, cleaning dirty side of belt	G14
Secondary speed detection for differential monitoring: 60 PPR motor mounted magnetic p/u (Available with speed sensor options 0-5 only)	G16
Acceptance test certificate: Manufacturer's test certificate M to DIN 55350, Part 18 and ISO 9000	C11
Stainless steel tag [69 x 50 mm (2.71 x 1.97 inch)]: Measuring-point number/identification (max. 16 characters) specify in plain text	Y15
Operating Instructions English French German Note: The operating instructions should be ordered as a separate item on the order. This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.	Order No. C) 7ML1998-5MS01 C) 7ML1998-5MS11 C) 7ML1998-5MS31

¹⁾ Available with Material Containment options H to L only

C) Subject to export regulations AL: N, ECCN: EAR99.



Weighfeeders

SITRANS weighfeeders



SITRANS WW200

Dimensional drawings

Open Construction

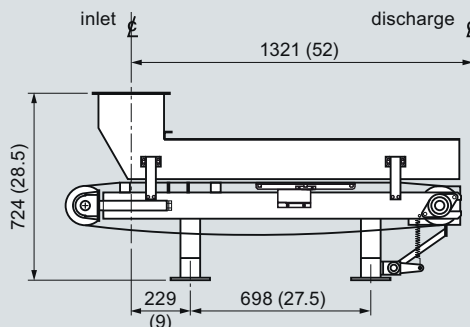

Enclosed Construction

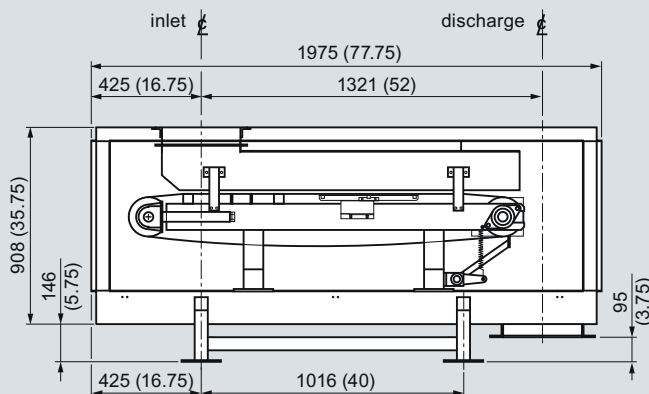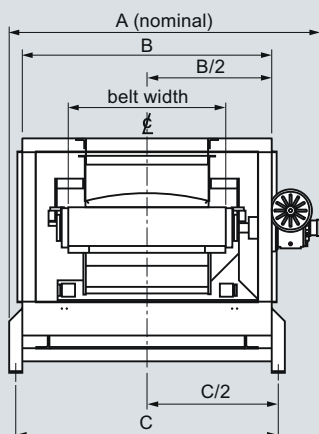

5

Open Construction

Belt width	A	B	C
305 (12)	696 (27.4)	257 (10.13)	425 (16.75)
457 (18)	848 (33.4)	333 (13.13)	578 (22.75)
610 (24)	1000 (39.4)	410 (16.13)	730 (28.75)
762 (30)	1153 (45.4)	486 (19.13)	883 (34.75)
914 (36)	1305 (51.4)	562 (22.13)	1035 (40.75)
1067 (42)	1458 (57.4)	638 (25.13)	1187 (46.75)
1219 (48)	1610 (63.4)	715 (28.13)	1340 (52.75)

Enclosed unit

Belt width	A	B	C
305 (12)	846 (33.3)	660 (26)	711 (28)
457 (18)	999 (39.3)	813 (32)	864 (34)
610 (24)	1151 (45.3)	965 (38)	1016 (40)
762 (30)	1304 (51.3)	1118 (44)	1168 (46)
914 (36)	1452 (57.3)	1270 (50)	1321 (52)
1067 (42)	1608 (63.3)	1422 (56)	1473 (58)
1219 (48)	1761 (69.3)	1575 (62)	1626 (64)


SITRANS WW200 dimensions in mm (inch)

Weighfeeders

SITRANS weighfeeders

SITRANS WW300

Overview

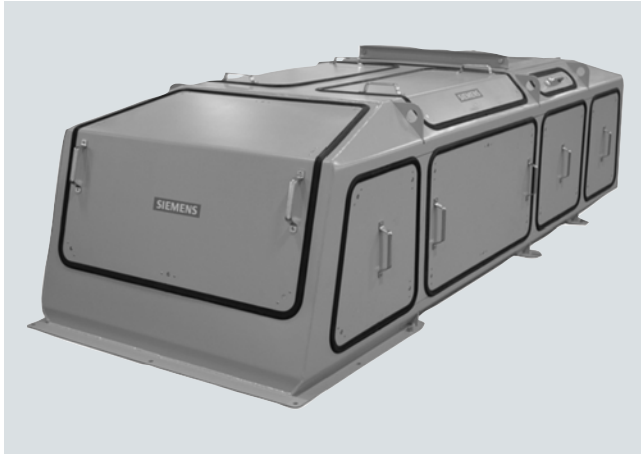

SITRANS WW300 is a medium- to high-capacity weighfeeder used for macro ingredient additives.

Benefits

- Rugged, durable design for heavy-duty applications
- Handles medium- to high-capacity loads
- Standard mild steel open or enclosed construction
- Heavy-duty 102 mm (4 inch) diameter idlers
- Large 203 mm (8 inch) minimum diameter head and tail pulleys for maximum traction
- Patented design
- Easy to replace endless belt
- Gravity tensioned belt cleaner
- Fast installation, easy to clean and maintain

Application

SITRANS WW300 is designed for industrial applications such as mining, cement, chemical processing, pulp and paper, and other heavy-duty industries.

Field tested and proven in hundreds of applications, it enhances profitability by ensuring accuracy, enhancing blend consistency, reducing downtime, and improving accountability and record keeping. The unique weigh system reduces dead load and applies live load directly to load cells for accurate measurement. The dual load cells are externally mounted for easy access and maintenance.

It is available in a variety of lengths from 1.6 m (63 inch), belt widths from under 0.5 m (19 inch) to 1.8 m (70 inch), several different inlet configurations and materials of construction. It can be configured to suit various applications.

Standard components include the belt weigh bridge, speed sensor and test weights, supported by Milltronics BW100, BW500, or SIWAREX FTC microprocessor-based integrators for easy blending, batching and feed rate control.

Technical specifications

SITRANS WW300

Mode of operation

Measuring principle

Strain gauge load cells and digital speed sensor

Typical application

Industrial and process applications in feeding, blending or rati-
ing in gypsum manufacturing

Measuring accuracy

Accuracy ¹⁾	± 0.5 % or better
Specified range	10 ... 100 % based on load
Design rate range	4.5 ... 800 t/h (5 ... 880 STPH)
Max volumetric flow	1284 m ³ /h (44800 ft ³ /h)

Medium conditions

Operating temperature	-10 ... +55 °C (+14 ... +131 °F)
-----------------------	----------------------------------

Design

Material	Mild steel with stainless steel [304 (1.4301) or 316 (1.4401)] or abrasion resistant contact parts optional
Load cells	Two corrosion-resistant platform type with mechanical overload protection [nickel plated alloy steel or 17-4 PH (1.4568) stainless steel construction]
• Non-linearity	± 0.03 %
• Non-repeatability	± 0.02 %
Speed sensor	Industrial duty, digital optical encoder, tail shaft mounted
Framework	<ul style="list-style-type: none"> • Painted structural steel • Cantilevered mild steel structural frame for quick and easy belt replacement

Pulleys

200 mm (8 inch) minimum, 508 mm (20 inch) maximum, pulley diameter crowned with 6 mm (¼ inch) rubber lagging on drive pulley for maximum traction

Idlers

Heavy-duty 100 mm (4 inch) CEMA C with precision ground ball bearings and triple labyrinth seals for longer life, CEMA D,E IMPACT where required

Belt speed

0.005 ... 0.36 m/s (1 ... 70 fpm)

Belting

- Black rubber, 150 ... 440 PIW 2 ply vulcanized endless with 'B' section (standard)
- Up to 127 mm (5 inch) corrugated sidewalls (optional)

Belt tension

- Screw type, telescoper module with 150 mm (6 inch) minimum travel
- Gravity tensioned self-steering belt tracker (optional)

Belt cleaning

- Gravity tensioned UHMW blade at head pulley
- Return plow at tail pulley

Drive motor

- 0.19 kW (0.25 HP), TEFC/TENV, 208/230/380/460/575 V AC, three phase or 90/180 V DC permanent magnet - both with flange mounted gear reducer
- Larger/other motor sizes and voltages available

Shipping weight

410 kg (900 lb) minimum

Approvals

For use in hazardous rated areas, consult factory

¹⁾ Accuracy subject to: On factory approved installations the weigh feeder system's totalized weight will be within the specified accuracy when compared to a known weighed material test sample. The test rate must be within the specified range of the design capacity and held constant for the duration of the test. The minimum material test sample must be equivalent to a sample obtained at the test flow rate for three revolutions of the belt or at least ten minutes running time, whichever is greater.

Weighfeeders



SITRANS weighfeeders

SITRANS WW300



Selection and Ordering data	Order No.
SITRANS WW300 Medium- to high-capacity weighfeeder used for macro ingredient additives.	Contact factory for ordering information.
<i>Operating Instructions</i>	
English	C) 7ML1998-5MQ01
German Note: The operating instructions should be ordered as a separate item on the order.	C) 7ML1998-5MQ31
This device is shipped with the Siemens Milltronics manual CD containing the complete operating instructions library.	
C) Subject to export regulations AL: N, ECCN: EAR99.	

Dimensional drawings

Open Construction

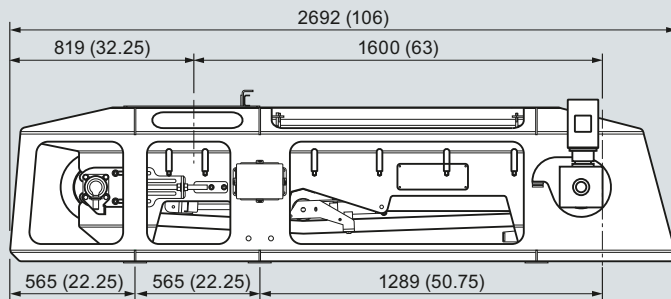

Enclosed Construction

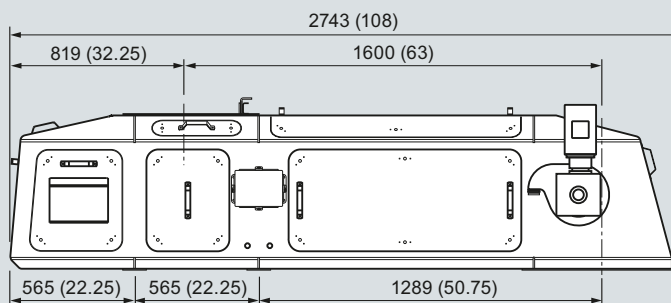

Belt width	B	D
457 (18)	768 (30.25)	718 (28.25)
610 (24)	921 (36.25)	870 (34.25)
762 (30)	1073 (42.25)	1022 (40.25)
914 (36)	1226 (48.25)	1175 (46.25)
1067 (42)	1378 (54.25)	1327 (52.25)
1219 (48)	1530 (60.25)	1480 (58.25)
1372 (54)	1683 (66.25)	1632 (64.25)
1524 (60)	1835 (72.25)	1784 (70.25)
1676 (66)	1988 (78.25)	1937 (76.25)
1829 (72)	2140 (84.25)	2089 (82.25)





SITRANS WW300, dimensions in mm (inch)

Weighfeeders

SITRANS weighfeeders

SITRANS Weighfedder Peripherals

Selection and Ordering data

		Order No.		Order No.
Milltronics Weighfeeder 400, 600, and 800 SITRANS WW200, WW300¹⁾ spare load cells				
For aluminum model, use nickel plated alloy steel				
Nickel plated				
10 kg (22 lb)		7MH7725-1EK		
15 kg (33.1 lb)		7MH7725-1EL		
20 kg (44 lb)		7MH7725-1EM		
30 kg (66.2 lb)		7MH7725-1EN		
Stainless steel				
6 kg (13.2 lb)	C)	7MH7725-1EG		
12 kg (26.4 lb)	C)	7MH7725-1EH		
30 kg (66.2 lb)	C)	7MH7725-1EJ		
25 lb (11.3 kg)	C)	PBD-23900224		
50 lb (22.7 kg)	C)	PBD-23900225		
100 lb (45.4 kg)	C)	PBD-23900242		
Milltronics Weighfeeder 120 O/ SITRANS WW300 spare load cells				
Nickel plated				
50 kg (110.2 lb)	C)	7MH7725-1CU		
100 kg (220.5 lb)	C)	7MH7725-1CV		
150 kg (330.7 lb)	C)	7MH7725-1CW		
200 kg (440.9 lb)	C)	7MH7725-1CX		
Stainless steel				
Stainless steel load cell				
<u>17-4 PH (1.4568) stainless steel construction with 304 (1.4301) stainless steel cover</u>				
50 lb (22.7 kg)	C)	7MH7725-1AC		
100 lb (45.4 kg)	C)	7MH7725-1AD		
250 lb (113.4 kg)	C)	7MH7725-1AE		
500 lb (226.8 kg)	C)	7MH7725-1AF		
Calibration hanger weights				
200 g (0.4 lb)	C)	7MH7724-1AF		
500 g (1.1 lb)	C)	7MH7724-1AG		
1000 g (2.2 lb)	C)	7MH7724-1AH		
2000 g (4.4 lb)		7MH7724-1AJ		
3500 g (7.7 lb)		7MH7724-1BQ		
5000 g (11 lb)		7MH7724-1AK		
7500 g (16.5 lb)		7MH7724-1BR		
8500 g (18.7 lb)		7MH7724-1BS		
10000 g (22 lb)		7MH7724-1BT		
12000 g (26.5 lb)		7MH7724-1BU		
15000 g (33.1 lb)		7MH7724-1BV		
Other accessories				
Siemens push button e-stop, enclosed model				3SB3801-0DF3
Siemens pull cord steel cable [10 m (32.81 inch)]				3SE7910-3AA
Siemens pull cord steel cable clamp				3SE7941-1AC
SIGUARD pull cord switch with metal enclosure				3SE71202D-D01
Siemens position switch, belt tracking, limit wobble				3SE2120-1R

¹⁾ For aluminum model, use nickel plated alloy steel

C) Subject to export regulations AL: N, ECCN: EAR99